

# REPLACEMENT / ALTERATION

Fax To: 301-963-1112

**MEASURING FORM** Email To: info@hydropool.com

### DEALER INFORMATION

DEALER CODE: \_\_\_\_\_ DATE: \_\_\_\_\_  
 COMPANY NAME: Hydro Pool and Spa, Inc.  
 ADDRESS: 7400 Lindbergh Dr.  
 CITY: Gaithersburg STATE: MD ZIP: 20879  
 NEW JOB NAME: \_\_\_\_\_  
 PO#: \_\_\_\_\_

### SHIPPING INSTRUCTIONS

SHIP TO: \_\_\_\_\_  
 ADDRESS: \_\_\_\_\_  
 CITY: \_\_\_\_\_ STATE: \_\_\_\_\_ ZIP: \_\_\_\_\_

### SHIP VIA

- BEST WAY  
 AIR SERVICE:  Overnight  2nd Day  3rd Day  
 CUSTOMER PICK-UP  
 MOTOR FREIGHT - Please specify carrier: \_\_\_\_\_

**SPECIFIC COVER TYPE MUST BE CHOSEN, OTHERWISE ONLY ONE QUOTE FOR GREEN MESH WILL BE GIVEN.**

### SUPER DENSE MESH COVERS

- LOOP-LOC II MESH GREEN SAFETY COVER  
 LOOP-LOC DESIGNER COLOR MESH ONLY  
 Blue  Black  Gray  Tan  
**ULTRA-LOC II SOLID COVERS** - Additional 2 to 4 anchors may need to be added due to material type.  
 ULTRA-LOC II SOLID SAFETY WITH MESH DRAINS (100% Solid Green Polypropylene)  
 ULTRA-LOC II SOLID SAFETY - NO DRAINS WITH PUMP (100% Solid Green Polypropylene, No Drains, Loop-Loc's Automatic Cover Pump must be purchased at an additional cost to be considered as a Safety Cover.)  
 LOOP-LOC ON-GROUND SWIMMING POOL COVER  
 Deck must be self supporting.  
 On-Ground Brackets  Wood Deck Anchors

**REPLACEMENT COVER** - Show existing anchor placement or return old cover, freight pre-paid. Specify if new hardware is required. (Return old cover whenever possible)

- New Anchors  New Springs  Pipe (Up Charge)  
 No Anchors  No Springs  
 Old Cover will be sent in if ordered. (Provide rough estimate, based on information given). For a Rough Estimate, please provide sketch, Total length of Raised Walls, Number of Cut Outs, Grid Size and Overall Length and Width.  
 Original Cover is a Loop-Loc.  
 Original Order # \_\_\_\_\_ Original Dealer \_\_\_\_\_  
 Original Job Name \_\_\_\_\_ Year/Age of over. \_\_\_\_\_  
 Replace Cover as is.  
 **Alter Cover** as per marks and instructions. If Springs are not removed prior to shipping a Spring removal charge of \$75.00 will be added.

### ADDITIONAL HARDWARE NEEDED (USE IF EXTRA HARDWARE IS REQUIRED ONLY)

Please note any additional hardware with quantities here: \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_

### PLEASE CHECK THE APPROPRIATE BOX:

**ESTIMATE**

If no box is checked, we will consider this an estimate.

**ORDER**

Please include your deposit check to expedite delivery!

**ADDITIONAL INFORMATION**

If this job has been submitted previously, please check the Additional or Confirming box.

**CONFIRMING**

\*If a cover is sent to LOOP-LOC for possible replacement, and is returned with no work done, a one-time \$96.00 inspection and handling fee will be charged.



**LOOP-LOC**

POOL COVERS  
 No Compromises... No Excuses!

LOOP-LOC, LTD.  
 390 Motor Parkway  
 Hauppauge, NY 11788

1-800-LOC-LOOP  
 In New York State 631-582-2626  
 Fax #: 631-582-2636, WWW.LOOPLOC.COM

ULTRA-LOC SOLID LOOP-LOC

ULTRA-LOC SOLID LOOP-LOC

LOOP-LOC, LTD. 2011

COMPANY NAME: Hydro Pool and Spa, Inc.

JOB NAME/P.O.#: \_\_\_\_\_

**\*\* DISTANCE FROM POINT "A" TO POINT "B" = \_\_\_\_\_ \*\***

**Anchors And Pool Must Be Measured From The Same Baseline. Baseline must be 3' back from any anchor.**

**"A-B" Measurements cannot be used unless this distance is given!**

**ANCHOR POINTS**

A		B		A		B		A		B		A		B	
1				16				31				46			
2				17				32				47			
3				18				33				48			
4				19				34				49			
5				20				35				50			
6				21				36				51			
7				22				37				52			
8				23				38				53			
9				24				39				54			
10				25				40				55			
11				26				41				56			
12				27				42				57			
13				28				43				58			
14				29				44				59			
15				30				45				60			

**REQUIRED INFORMATION!**

**POINT TO POINT CROSS DIMENSIONS**

PT. \_\_\_\_\_ to PT. \_\_\_\_\_

Distance = \_\_\_\_\_

PT. \_\_\_\_\_ to PT. \_\_\_\_\_

Distance = \_\_\_\_\_

PT. \_\_\_\_\_ to PT. \_\_\_\_\_

Distance = \_\_\_\_\_

PT. \_\_\_\_\_ to PT. \_\_\_\_\_

Distance = \_\_\_\_\_

Is Coping Rough?  YES  NO

Price W / "Undr Covr" Padding?

YES  NO

LOOP-LOC Pipe wanted For Entire Cover?

YES  NO

Number of Pipes needed. \_\_\_\_\_

**POOL POINTS**

A		B		A		B		A		B		A		B	
1				16				31				46			
2				17				32				47			
3				18				33				48			
4				19				34				49			
5				20				35				50			
6				21				36				51			
7				22				37				52			
8				23				38				53			
9				24				39				54			
10				25				40				55			
11				26				41				56			
12				27				42				57			
13				28				43				58			
14				29				44				59			
15				30				45				60			

What is Corner Radius? \_\_\_\_\_

**RAISED AREAS**

Begins @ PT. # \_\_\_\_\_ Ends @ PT. # \_\_\_\_\_

Begins @ PT. # \_\_\_\_\_ Ends @ PT. # \_\_\_\_\_

Begins @ PT. # \_\_\_\_\_ Ends @ PT. # \_\_\_\_\_

Begins @ PT. # \_\_\_\_\_ Ends @ PT. # \_\_\_\_\_

Please note: Loop-Loc's Cable-loc Safety

Barrier Will Be Used In Raised Wall Area,

Existing Eyebolts Must Be Replaced With

Cable Wall Anchors.

**Up and Overs**

PT. # \_\_\_\_\_ Height \_\_\_\_\_

PT. # \_\_\_\_\_ Height \_\_\_\_\_

PT. # \_\_\_\_\_ Height \_\_\_\_\_

PT. # \_\_\_\_\_ Height \_\_\_\_\_


PT. # \_\_\_\_\_ Height \_\_\_\_\_



# REPLACEMENT/ALTERATION MEASURING INSTRUCTIONS

## Measure Existing Cover:


1. Begin with a freehand sketch of the cover and pool.
2. Measure the overall length and width of the cover.
3. Measure all grid sections along the width and length of the cover.
4. Measure all the cover edges from corner to corner.
5. Measure the distance the anchors are set back from poolline. Indicate on sketch any anchors that are less than 16" from poolline or more than 24" from cover.
6. Measure cover overlap.

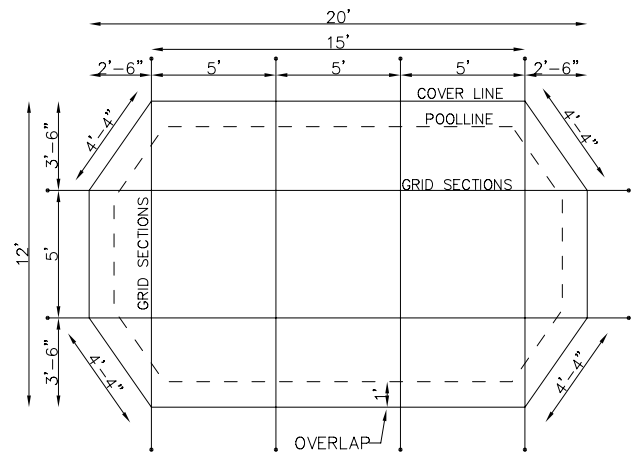

## A-B Measure of Pool & Anchors:

\*Anchors and Pool must be measured from same baseline A-B line must be at least 3' back from any anchor\*\*

1. Begin with a freehand sketch indicating pool shape, obstructions and location of AB line.
2. Take AB measurements to each anchor on deck.
3. Take AB measurements around entire pool and to any obstructions within 3' of the pool

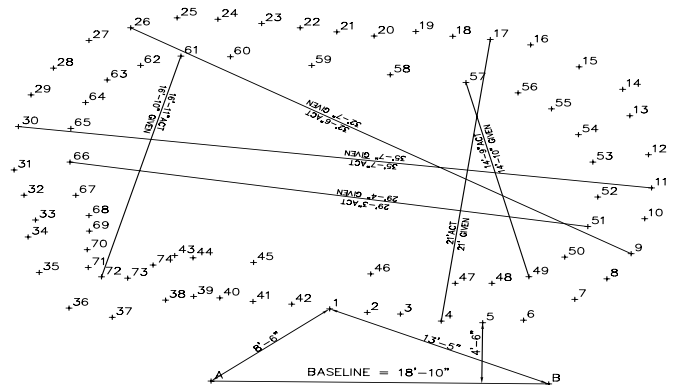

## MARKING COVER INSTRUCTIONS FOR ALTERATIONS

\*\*Use a black marker or light colored lumber crayon to mark cover. Do not place notes on the cover.\*\*

1. If adding or taking away material show arrow in the correct direction and write dimension of amount of material to be added or taken away next to arrow.
2. Mark start and end point for raised walls, cut outs and steps.
3. New drain and pad locations should be marked with an X at the center location of where the pad or drain is wanted. Standard drain/pad sizes will be used unless otherwise noted
4. Give a detailed description of alteration on measure form.

